

SMD Voltage Controlled Oscillator

Frequency 900-1800MHz

VL1800M


Features

- Miniature Size
- Surface Mount Package
- Electrically Shielded
- Low Phase Noise
- Highly Linear Tuning

Description

The VL1800M is a fundamental single ended oscillator designed for use in cost sensitive wireless and telemetry applications. The device has been optimized by careful selection of the bipolar transistor and varactor diode for low phase noise and high linearity tuning characteristics.

SK605 Package

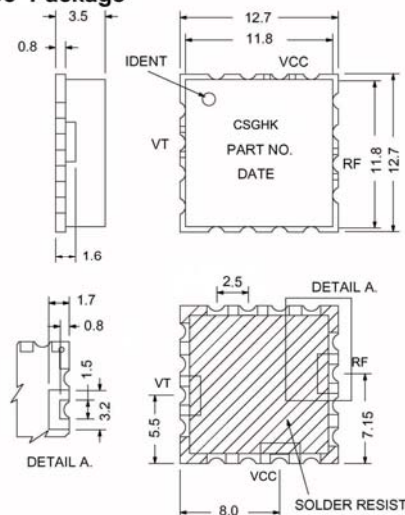

Electrical Specifications, $T_A = +25^{\circ}\text{C}$, $V_{CC} = +8\text{V}$ (unless otherwise stated)

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Frequency Rangs		MHz	900		1800
Tuning Voltage (V)		V	1.0		20.0
RF Output Power	900-1800MHz	dBm	6.0		10.0
Supply Voltage (VCC)		V	7.75	8.0	8.25
Supply Current (Icc)		mA		26	30
Phase Noise :					
	@10kHz Offset:	dBc/Hz		-102	-100
	@100kHz Offset:	dBc/Hz		-124	-120
Average Tuning Sensitivity	900-1800MHz	MHz/V		57	
Harmonic Outputs		dBc		-10	-5
OperatingTemperature Range		$^{\circ}\text{C}$	-55		+85
Tune Input Capacitance		PF		47	

Comments

All specifications apply with a 50 ohm load impedance.



SMD Voltage Controlled Oscillator

Frequency 900-1800MHz

VL1800M

Tuning Voltage (v)	Output Frequency (MHz)			Output Power (dBm)			Harmonic Suppression (dBc)		
	-55℃	+25℃	+85℃	-55℃	+25℃	+85℃	-55℃	+25℃	+85℃
1.0	818.9	799.1	781.3	8.4	8.2	7.3	-	-	-
2.0	878.4	861.1	845.5	8.6	8.2	7.0	-	-	-
3.0	935.1	918.8	906.0	9.1	8.4	7.3	-	-	-
4.0	988.9	975.0	964.2	9.1	8.4	7.0	-	-	-
5.0	1043.7	1029.6	1020.4	8.8	8.2	6.7	-	-	-
6.0	1098.2	1085.6	1077.9	8.9	8.3	6.8	-	-	-
7.0	1154.5	1141.9	1134.5	8.9	8.2	6.7	-	-	-
8.0	1210.6	1200.1	1193.7	9.1	8.2	6.7	-	-	-
9.0	1271.5	1261.1	1253.6	9.0	8.1	6.7	-	-	-
10.0	1331.8	1322.5	1316.1	8.7	8.0	6.6	-	-	-
11.0	1393.7	1386.5	1379.0	9.0	7.9	6.6	-	-	-
12.0	1455.8	1448.9	1441.5	9.0	8.0	6.8	-	-	-
13.0	1516.1	1510.4	1505.6	9.1	8.0	6.7	-	-	-
14.0	1579.2	1572.1	1564.9	8.5	7.6	6.5	-	-	-
15.0	1635.5	1628.1	1621.7	8.5	7.8	6.5	-	-	-
16.0	1694.9	1679.2	1671.2	8.0	7.8	6.7	-	-	-
17.0	1738.1	1727.8	1719.2	8.2	7.6	6.5	-	-	-
18.0	1782.1	1771.9	1763.4	8.6	7.9	6.6	-	-	-
19.0	1824.0	1812.7	1803.6	8.8	8.1	6.6	-	-	-
20.0	1861.8	1850.3	1841.3	8.7	7.9	6.3	-	-	-
21.0	1898.0	1885.4	1857.2	8.6	7.7	6.1	-	-	-