

SMD Voltage Controlled Oscillator

Frequency 1500-1900MHz

VL1900M


Features

- Miniature Size
- Surface Mount Package
- Electrically Shielded
- Low Phase Noise
- Highly Linear Tuning

Description

The VL1900M is a fundamental single ended oscillator designed for use in cost sensitive wireless and telemetry applications. The device has been optimized by careful selection of the bipolar transistor and varactor diode for low phase noise and high linearity tuning characteristics.

SK605 Package

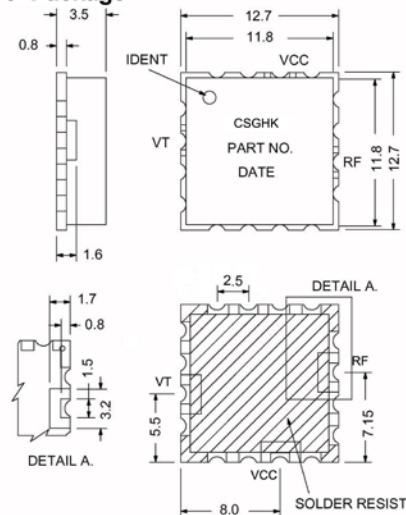

Electrical Specifications, $T_A = +25^{\circ}\text{C}$, $V_{CC} = +8\text{V}$ (unless otherwise stated)

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Frequency Rangs		MHz	1500		1900
Tuning Voltage (V)		V	0.5		20.0
RF Output Power	1500-1900MHz	dBm	6.0		10.0
Supply Voltage (VCC)		V	7.75	8.0	8.25
Supply Current (Icc)		mA		26	30
Phase Noise :					
	@10kHz Offset:	dBc/Hz		-100	-97
	@100kHz Offset:	dBc/Hz		-120	-116
Average Tuning Sensitivity	1500-1900MHz	MHz/V		26.5	
Harmonic Outputs		dBc		-10	-5
OperatingTemperature Range		$^{\circ}\text{C}$	-40		+85
Tune Input Capacitance		PF		47	

Comments

All specifications apply with a 50 ohm load impedance.

SMD Voltage Controlled Oscillator

Frequency 1500-1900MHz

VL1900M

Tuning Voltage (v)	Output Frequency (MHz)			Output Power (dBm)			Harmonic Suppression (dBc)		
	-40℃	+25℃	+85℃	-40℃	+25℃	+85℃	-40℃	+25℃	+85℃
0.5	1465.8	1455.7	1446.1	9.5	8.5	7.4	-	-	-
1.0	1478.8	1470.0	1462.1	9.6	8.6	7.4	-	-	-
2.0	1503.9	1494.8	1486.0	9.7	8.7	7.7	-	-	-
3.0	1525.4	1516.9	1509.6	9.5	8.6	7.4	-	-	-
4.0	1548.7	1539.6	1530.7	9.4	8.4	7.3	-	-	-
5.0	1571.2	1560.7	1553.0	8.8	8.3	7.3	-	-	-
6.0	1593.8	1585.3	1576.0	9.0	8.2	7.1	-	-	-
7.0	1620.3	1608.1	1598.9	8.7	8.3	7.5	-	-	-
8.0	1645.9	1634.2	1624.5	8.6	8.4	7.4	-	-	-
9.0	1674.3	1662.7	1651.4	9.1	8.5	7.5	-	-	-
10.0	1705.2	1691.1	1680.2	8.9	8.4	7.7	-	-	-
11.0	1736.5	1721.7	1711.5	8.5	8.3	7.5	-	-	-
12.0	1767.4	1754.0	1743.9	8.6	8.4	7.3	-	-	-
13.0	1799.3	1786.6	1775.4	9.0	8.7	7.6	-	-	-
14.0	1831.1	1817.9	1805.7	9.4	8.9	8.1	-	-	-
15.0	1861.6	1847.1	1835.5	9.3	8.8	8.1	-	-	-
16.0	1889.6	1874.7	1864.0	8.9	8.7	7.8	-	-	-
17.0	1915.2	1902.1	1890.3	8.9	8.7	7.6	-	-	-
18.0	1941.4	1925.6	1913.5	9.2	8.8	8.1	-	-	-
19.0	1963.6	1949.3	1937.8	9.2	8.9	7.8	-	-	-
20.0	1985.4	1970.8	1957.8	9.4	9.0	8.2	-	-	-