

SMD Voltage Controlled Oscillator

Frequency 1900-2100MHz


VP2000M

Features

- Miniature Size
- Surface Mount Package
- Electrically Shielded
- Low Phase Noise
- Highly Linear Tuning

Description

The VP2000M is a fundamental single ended oscillator designed for use in cost sensitive wireless and telemetry applications. The device has been optimized by careful selection of the bipolar transistor and varactor diode for low phase noise and high linearity tuning characteristics.

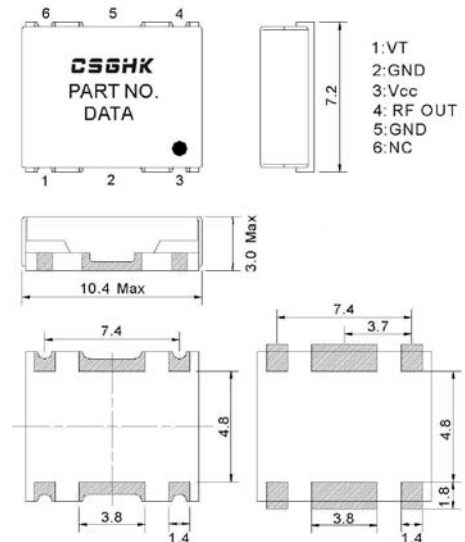

Electrical Specifications, $T_A = +25^\circ\text{C}$, $V_{CC} = +5\text{V}$ (unless otherwise stated)

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Frequency Rangs		MHz	1900		2100
Tuning Voltage (V)		V	0.3		4.7
RF Output Power	1900~2100MHz	dBm	-3.0		3.0
Supply Voltage (VCC)		V	4.75		5.25
Supply Current (Icc)		mA		25	30
Phase Noise :					
	@10kHz Offset:	dBc/Hz		-102	-98
	@100kHz Offset:	dBc/Hz		-121	-117
Average Tuning Sensitivity	1900~2100MHz	MHz/V		67	
Harmonic Outputs		dBc		-15	
OperatingTemperature Range		$^\circ\text{C}$	-40		+85
Tune Input Capacitance		PF		18	

Comments

All specifications apply with a 50 ohm load impedance.

SMD Voltage Controlled Oscillator

Frequency

VP1650M

Tuning Voltage (v)	Output Frequency (MHz)	Tuning Sensitivity (MHz/V)	Output Power (dBm)	Harmonic Suppression (dBc)
-55℃ 0.3V	1875.0		0.6	
0.5	1890.0		1.2	
1.0	1928.2		1.6	
1.5	1965.4		1.6	
2.0	2000.8		1.5	
2.5	2034.7		1.5	
3.0	2067.9		1.4	
3.5	2100.0		1.5	
4.0	2129.8		1.6	
4.5	2159.9		1.5	
4.7	2170.7		1.6	
+25℃ 0.3V	1867.0		-0.9	
0.5	1883.1		-0.5	
1.0	1921.5		0.0	
1.5	1956.3	调整说明： 微调频率可在线圈位 子加锡！	0.2	
2.0	1990.0		0.3	
2.5	2022.6		0.6	
3.0	2055.6		0.8	
3.5	2087.9		0.9	
4.0	2119.0		0.9	
4.5	2149.2		0.8	
4.7	2160.4		0.9	
+85℃ 0.3V	1863.9		-4.2	
0.5	1880.7		-4.0	
1.0	1917.7		-3.5	
1.5	1951.0		-3.2	
2.0	1983.8		-2.9	
2.5	2016.3		-2.5	
3.0	2049.5		-2.4	
3.5	2083.8		-2.3	
4.0	2116.6		-2.5	
4.5	2148.3		-2.8	
4.7	2160.1		-2.6	