


SURFACE MOUNT MODEL VOLTAGE CONTROLLED OSCILLATOR

Frequency 1015-1115MHz


VT1115M

FEATURES:

- ▶ Miniature Size
- ▶ Surface Mount Package
- ▶ Low Phase Noise Performance
- ▶ Electrically Shielded
- ▶ Highly Linear Tuning

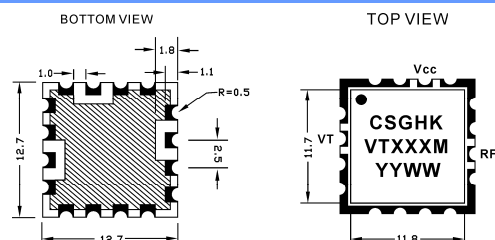

ALL OTHER PINS ARE GROUND

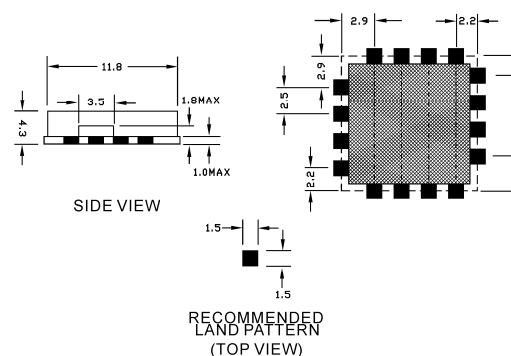

Electrical Specifications, $T_A = +25^{\circ}\text{C}$, $V_{CC} = +5.0\text{V}$ (unless otherwise stated)

Parameter	Test Conditions	Min	Typ	Max	Units
Frequency Rangs		1015		1115	MHz
Tuning Voltage (V)		0.5		4.5	V
RF Output Power	1015-1115MHz	-3.0		+3.0	dBm
Supply Voltage (Vcc)		4.75		5.25	V
Supply Current (Icc)			15	20	mA
Phase Noise :					
	@10kHz Offset:		-103	-100	dBc/Hz
	@100kHz Offset:		-123	-120	dBc/Hz
Average Tuning Sensitivity	1015-1115MHz		33.5		MHz/V
Harmonic Outputs			-15		dBc
OperatingTemperature Range		-40		+85	$^{\circ}\text{C}$
Tune Input Capacitance			33		PF
Output Impedance -			50		Ω
Package Type	SK605(12.7X12.7X4.3mm)				



SMD Voltage Controlled Oscillator

Frequency 1015-1115MHz

VT1115M

[illegible]