


SURFACE MOUNT MODEL VOLTAGE CONTROLLED OSCILLATOR

Frequency 2565-2590MHz


VT2590M

FEATURES:

- ▶ Miniature Size
- ▶ Surface Mount Package
- ▶ Low Phase Noise Performance
- ▶ Electrically Shielded
- ▶ Highly Linear Tuning

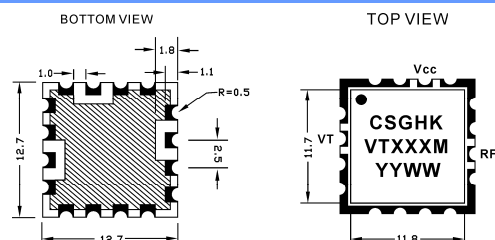

ALL OTHER PINS ARE GROUND

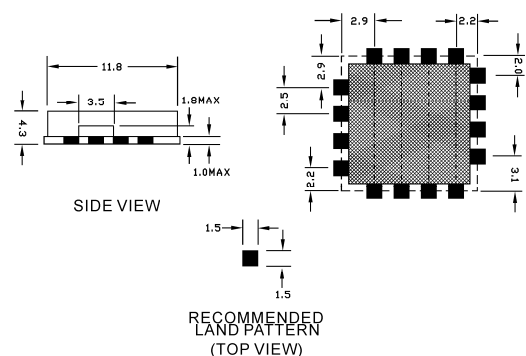

Electrical Specifications, $T_A = +25^{\circ}\text{C}$, $V_{CC} = +5.0\text{V}$ (unless otherwise stated)

Parameter	Test Conditions	Min	Typ	Max	Units
Frequency Rangs		2565		2590	MHz
Tuning Voltage (V)		0.5		4.5	V
RF Output Power	2565-2590MHz	0.0		4.0	dBm
Supply Voltage (Vcc)		4.75	5	5.25	V
Supply Current (Icc)			27	30	mA
Phase Noise :					
	@10kHz Offset:		-101	-98	dBc/Hz
	@100kHz Offset:		-121	-118	dBc/Hz
Average Tuning Sensitivity	2565-2590MHz		25.8		MHz/V
Harmonic Outputs			-15		dBc
OperatingTemperature Range		-40		+85	$^{\circ}\text{C}$
Tune Input Capacitance			12		PF
Output Impedance -			50		Ω
Package Type	SK605(12.7X12.7X4.3mm)				



SMD Voltage Controlled Oscillator

Frequency 2565-2590MHz

VT2590M

[illegible]