



SURFACE MOUNT MODEL VOLTAGE CONTROLLED OSCILLATOR

Frequency 1050-1150MHz

VT1150M

FEATURES:

- ▶ Miniature Size
- ▶ Surface Mount Package
- ▶ Low Phase Noise Performance
- ▶ Electrically Shielded
- ▶ Highly Linear Tuning

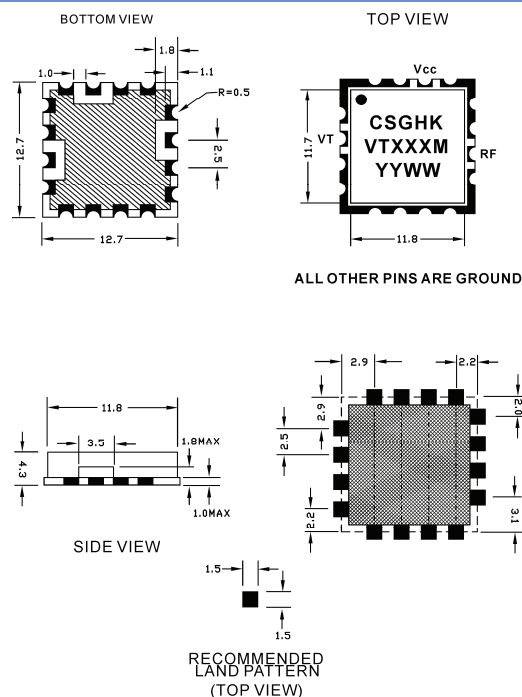

Electrical Specifications, $T_A = +25^{\circ}\text{C}$, $V_{CC} = +5.0\text{V}$ (unless otherwise stated)

Parameter	Test Conditions	Min	Typ	Max	Units
Frequency Rangs		1050		1150	MHz
Tuning Voltage (V)		0.5		4.5	V
RF Output Power	1050-1150 MHz	1.0		5.0	dBm
Supply Voltage (Vcc)		4.75		5.25	V
Supply Current (Icc)			24	27	mA
Phase Noise :					
	@10kHz Offset:		-108	-105	dBc/Hz
	@100kHz Offset:		-128	-125	dBc/Hz
Average Tuning Sensitivity	1050-1150 MHz		32.2		MHz/V
Harmonic Outputs			-10		dBc
OperatingTemperature Range		-55		+85	$^{\circ}\text{C}$
Tune Input Capacitance			27		PF
Output Impedance -			50		Ω
Package Type	SK605(12.7X12.7X4.3mm)				



SMD Voltage Controlled Oscillator

Frequency **1050-1150MHz**

VT1150M

[illegible]