

SMD Voltage Controlled Oscillator

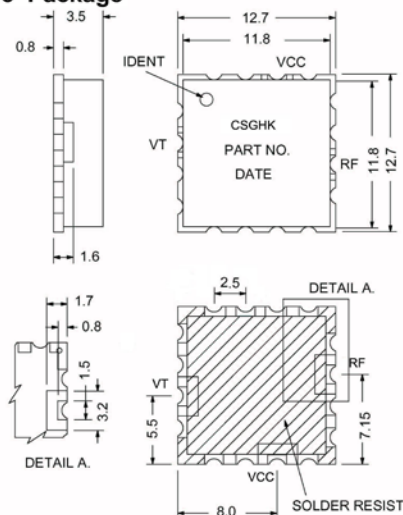
Frequency 1914-1929MHz**VT1929M**

Features

- Miniature Size
- Surface Mount Package
- Electrically Shielded
- Low Phase Noise
- Highly Linear Tuning

Description

The VT1929M is a fundamental single ended oscillator designed for use in cost sensitive wireless and telemetry applications. The device has been optimized by careful selection of the bipolar transistor and varactor diode for low phase noise and high linearity tuning characteristics.

SK605 Package

Electrical Specifications, $T_A = +25^\circ\text{C}$, $V_{CC} = +5\text{V}$ (unless otherwise stated)

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Frequency Rangs		MHz	1914		1929
Tuning Voltage (V)		V	0.5		4.5
RF Output Power	1914–1929MHz	dBm	0.0		4.0
Supply Voltage (VCC)		V	4.75		5.25
Supply Current (Icc)		mA		20	25
Phase Noise :					
	@10kHz Offset:	dBc/Hz		-109	-105
	@100kHz Offset:	dBc/Hz		-129	-125
Average Tuning Sensitivity	1914–1929MHz	MHz/V		10	
Harmonic Outputs		dBc		-15	
OperatingTemperature Range		°C	-40		+85
Tune Input Capacitance		PF		18	

Comments

All specifications apply with a 50 ohm load impedance.



SMD Voltage Controlled Oscillator

Frequency 1914-1929MHz

VT1929M

Tuning Voltage (v)	Output Frequency (MHz)	Tuning Sensitivity (MHz/V)	Output Power (dBm)	Harmonic Suppression (dBc)
-55℃				
0.5	1907.1		3.0	
1.0	1912.3		3.0	
1.5	1917.8		3.1	
2.0	1923.7		3.1	
2.5	1930.1		3.0	
3.0	1936.8		3.0	
3.5	1943.1		3.2	
4.0	1949.3		3.4	
4.5	1955.8		3.5	
+25℃				
0.5	1900.0		2.0	
1.0	1905.3		2.2	
1.5	1910.3		2.4	
2.0	1915.8		2.5	
2.5	1921.5		2.5	
3.0	1928.0		2.5	
3.5	1934.9		2.5	
4.0	1941.5		2.6	
4.5	1947.7		2.8	
+85℃				
0.5	1894.1		1.1	
1.0	1899.8		1.3	
1.5	1904.9		1.5	
2.0	1910.1		1.8	
2.5	1915.4		1.9	
3.0	1921.4		1.9	
3.5	1927.9		1.8	
4.0	1934.9		1.8	
4.5	1941.5		2.0	