

## SMD Voltage Controlled Oscillator

Frequency 260-270MHz

VT265M


### Features

- Miniature Size
- Surface Mount Package
- Electrically Shielded
- Low Phase Noise
- Highly Linear Tuning

### Description

The VT265M is a fundamental single ended oscillator designed for use in cost sensitive wireless and telemetry applications. The device has been optimized by careful selection of the bipolar transistor and varactor diode for low phase noise and high linearity tuning characteristics.

SK605 Package

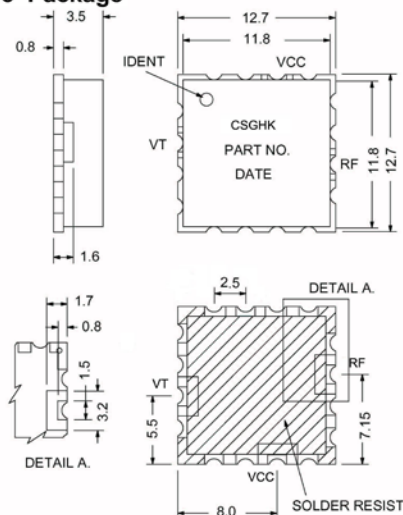

Electrical Specifications,  $T_A = +25^\circ\text{C}$ ,  $V_{CC} = +12\text{V}$  (unless otherwise stated)

| Parameter                  | Test Conditions | Units            | Min.  | Typ. | Max.  |
|----------------------------|-----------------|------------------|-------|------|-------|
| Frequency Rangs            |                 | MHz              | 260   |      | 270   |
| Tuning Voltage (V)         |                 | V                | 3.0   |      | 4.0   |
| RF Output Power            | 260-270MHz      | dBm              | +7.0  |      | +10.0 |
| Supply Voltage (VCC)       |                 | V                | 11.75 | 12   | 12.25 |
| Supply Current (Icc)       |                 | mA               |       | 17   | 23    |
| Phase Noise :              |                 |                  |       |      |       |
|                            | @10kHz Offset:  | dBc/Hz           |       | -109 | -107  |
|                            | @100kHz Offset: | dBc/Hz           |       | -129 | -127  |
| Average Tuning Sensitivity | 260-270MHz      | MHz/V            |       | 2.5  |       |
| Harmonic Outputs           |                 | dBc              |       | -15  |       |
| OperatingTemperature Range |                 | $^\circ\text{C}$ | -55   |      | +85   |
| Tune Input Capacitance     |                 | PF               |       | 330  |       |

### Comments

All specifications apply with a 50 ohm load impedance.

## SMD Voltage Controlled Oscillator

Frequency 260-270MHz

VT265M

| Tuning Voltage (v) | Output Frequency (MHz) | Tuning Sensitivity (MHz/V) | Output Power (dBm) | Harmonic Suppression (dBc) |
|--------------------|------------------------|----------------------------|--------------------|----------------------------|
| <b>+85℃</b>        |                        |                            |                    |                            |
| 0.5                |                        |                            |                    |                            |
| 1.0                |                        |                            |                    |                            |
| 1.5                |                        |                            |                    |                            |
| 2.0                |                        |                            |                    |                            |
| 2.5                |                        |                            |                    |                            |
| 3.0                | <b>257.3</b>           |                            | <b>7.5</b>         | <b>-15.0</b>               |
| 3.5                | <b>263.3</b>           |                            | <b>7.4</b>         | <b>-15.3</b>               |
| 4.0                | <b>270.1</b>           | <b>12.8</b>                | <b>7.4</b>         | <b>-15.7</b>               |
| 4.5                |                        |                            |                    |                            |
| <b>+25℃</b>        |                        |                            |                    |                            |
| 0.5                |                        |                            |                    |                            |
| 1.0                |                        |                            |                    |                            |
| 1.5                |                        |                            |                    |                            |
| 2.0                |                        |                            |                    |                            |
| 2.5                |                        |                            |                    |                            |
| 3.0                | <b>259.3</b>           |                            | <b>7.5</b>         | <b>-15.0</b>               |
| 3.5                | <b>265.0</b>           |                            | <b>7.6</b>         | <b>-15.2</b>               |
| 4.0                | <b>271.6</b>           | <b>12.3</b>                | <b>7.5</b>         | <b>-15.0</b>               |
| 4.5                |                        |                            |                    |                            |
| <b>-55℃</b>        |                        |                            |                    |                            |
| 0.5                |                        |                            |                    |                            |
| 1.0                |                        |                            |                    |                            |
| 1.5                |                        |                            |                    |                            |
| 2.0                |                        |                            |                    |                            |
| 2.5                |                        |                            |                    |                            |
| 3.0                | <b>262.5</b>           |                            | <b>7.5</b>         | <b>-15.2</b>               |
| 3.5                | <b>268.4</b>           |                            | <b>7.5</b>         | <b>-15.0</b>               |
| 4.0                | <b>274.4</b>           | <b>11.9</b>                | <b>7.6</b>         | <b>-15.0</b>               |
| 4.5                |                        |                            |                    |                            |