

SMD Voltage Controlled Oscillator

Frequency 2875-2885MHz

VT2880M


Features

- Miniature Size
- Surface Mount Package
- Electrically Shielded
- Low Phase Noise
- Highly Linear Tuning

Description

The VT2880M is a fundamental single ended oscillator designed for use in cost sensitive wireless and telemetry applications. The device has been optimized by careful selection of the bipolar transistor and varactor diode for low phase noise and high linearity tuning characteristics.

SK605 Package

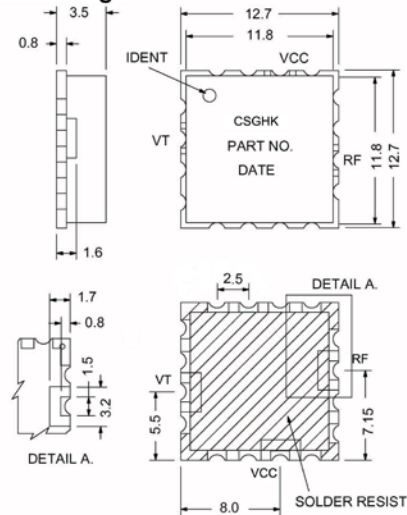

Electrical Specifications, $T_A = +25^\circ\text{C}$, $V_{CC} = +5\text{V}$ (unless otherwise stated)

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Frequency Rangs		MHz	2875		2885
Tuning Voltage (V)		V	2.0		5.0
RF Output Power	2875–2885MHz	dBm		7.0	
Supply Voltage (VCC)		V	4.75	5	5.25
Supply Current (Icc)		mA		17	20
Phase Noise :					
	@10kHz Offset:	dBc/Hz		-93	-90
	@100kHz Offset:	dBc/Hz		-112	-109
Average Tuning Sensitivity	2875–2885MHz	MHz/V		32.7	
Harmonic Outputs		dBc		-15	
OperatingTemperature Range		$^\circ\text{C}$	-40		+85
Tune Input Capacitance		PF		7.0	

Comments

All specifications apply with a 50 ohm load impedance.