



SURFACE MOUNT MODEL VOLTAGE CONTROLLED OSCILLATOR

Frequency 250-350MHz

VT350M

FEATURES:

- ▶ Miniature Size
- ▶ Surface Mount Package
- ▶ Low Phase Noise Performance
- ▶ Electrically Shielded
- ▶ Highly Linear Tuning

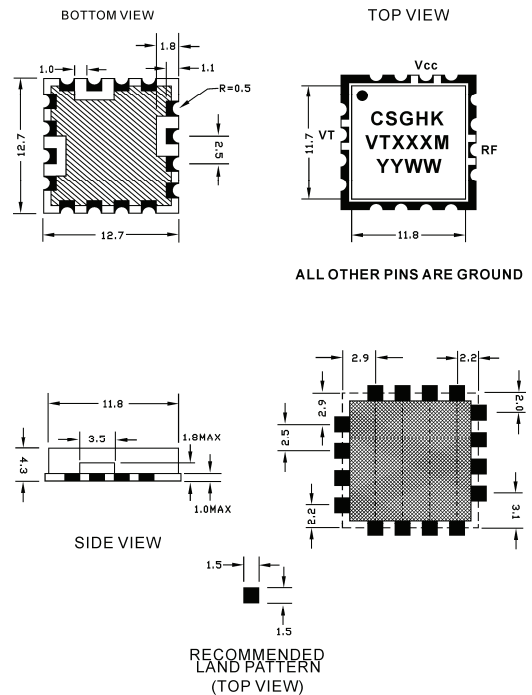

Electrical Specifications, $T_A = +25^\circ\text{C}$, $V_{CC} = +5.0\text{V}$ (unless otherwise stated)

Parameter	Test Conditions	Min	Typ	Max	Units
Frequency Rangs		250		350	MHz
Tuning Voltage (V)		1.0		10.0	V
RF Output Power	250-350 MHz	-2.0		+2.0	dBm
Supply Voltage (Vcc)		4.75		5.25	V
Supply Current (Icc)			12	15	mA
Phase Noise :					
	@10kHz Offset:		-112	-106	dBc/Hz
	@100kHz Offset:		-133	-127	dBc/Hz
Average Tuning Sensitivity	250-350 MHz		12.9		MHz/V
Harmonic Outputs			-15		dBc
OperatingTemperature Range		-55		+85	$^\circ\text{C}$
Tune Input Capacitance			100		PF
Output Impedance -			50		Ω
Package Type	SK605(12.7X12.7X4.3mm)				



SMD Voltage Controlled Oscillator

Frequency 250-350MHz

VT350M

[illegible]