

SMD Voltage Controlled Oscillator

Frequency 225-582MHz

VL582N


Features

- Miniature Size
- Surface Mount Package
- Electrically Shielded
- Low Phase Noise
- Highly Linear Tuning

Description

The VL582N is a fundamental single ended oscillator designed for use in cost sensitive wireless and telemetry applications. The device has been optimized by careful selection of the bipolar transistor and varactor diode for low phase noise and high linearity tuning characteristics.

SK605 Package

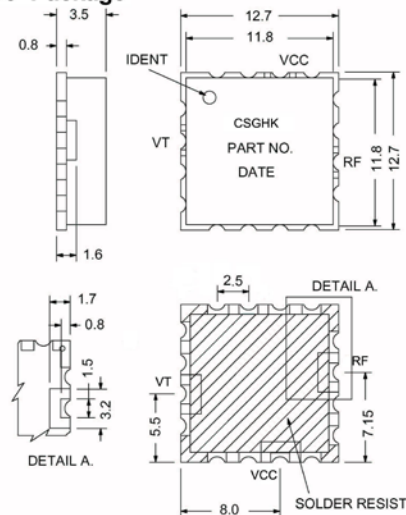

Electrical Specifications, $T_A = +25^{\circ}\text{C}$, $V_{CC} = +12\text{V}$ (unless otherwise stated)

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Frequency Rangs		MHz	225		582
Tuning Voltage (V)		V	0.5		20
RF Output Power	225-582MHz	dBm	6.0		10.0
Supply Voltage (VCC)		V	11.75	12	12.25
Supply Current (Icc)		mA		13	17
Phase Noise :					
	@10kHz Offset:	dBc/Hz		-111	-102
	@100kHz Offset:	dBc/Hz		-130	-124
Average Tuning Sensitivity	225-582MHz	MHz/V		20.3	
Harmonic Outputs		dBc		-20	
OperatingTemperature Range		$^{\circ}\text{C}$	-55		+85
Tune Input Capacitance		PF		100	

Comments

All specifications apply with a 50 ohm load impedance.



SMD Voltage Controlled Oscillator

Frequency 225-582MHZ

VL582N

Tuning Voltage (V)	-55℃			+25℃			+85℃		
	Frequency (MHz)	Power (dBm)	2 ⁿ (dBc)	Frequency (MHz)	Power (dBm)	2 ⁿ (dBc)	Frequency (MHz)	Power (dBm)	2 ⁿ (dBc)
0.5	211.7	8.1	-20.7	211.3	7.4	-21.5	209.5	6.3	-23.9
1.0	222.0	8.2	-23.4	220.8	7.9	-24.3	219.2	6.9	-26.0
2.0	239.9	8.3	-26.0	238.2	8.2	-26.7	236.5	7.4	-27.1
3.0	255.9	8.2	-25.1	254.3	8.0	-23.0	252.6	7.1	-22.2
4.0	271.6	8.8	-24.4	269.8	8.6	-21.8	267.2	7.8	-20.5
5.0	288.8	8.4	-24.4	285.8	8.3	-18.3	283.9	7.4	-18.5
6.0	305.6	8.8	-24.5	302.7	8.7	-20.3	299.5	8.0	-18.8
7.0	323.3	8.9	-23.7	320.4	8.6	-20.2	318.3	7.7	-19.1
8.0	344.7	8.5	-28.1	340.3	8.6	-22.2	336.7	8.1	-19.9
9.0	364.0	9.1	-27.4	360.1	8.7	-23.6	358.0	7.8	-21.5
10.0	386.8	8.6	-28.6	383.9	8.1	-25.1	380.5	7.5	-23.7
11.0	408.3	9.2	-29.7	404.3	8.9	-26.7	400.6	8.3	-25.0
12.0	429.1	9.6	-27.2	425.2	8.6	-24.9	423.3	7.5	-24.8
13.0	456.1	8.1	-32.1	451.3	7.7	-28.1	447.6	7.1	-26.3
14.0	480.7	8.0	-32.8	474.8	8.1	-29.3	469.7	7.8	-27.7
15.0	502.3	8.7	-31.9	497.4	8.1	-29.0	492.3	7.2	-26.8
16.0	524.2	8.4	-27.4	517.8	7.8	-26.2	514.1	7.0	-26.8
17.0	548.5	7.4	-27.9	543.7	7.3	-29.1	539.9	6.7	-29.7
18.0	572.3	7.7	-31.4	567.4	7.0	-32.2	564.0	6.1	-31.6
19.0	594.1	6.8	-31.5	589.2	6.3	-31.3	584.9	6.0	-31.4
20.0	612.7	7.5	-32.3	606.2	7.2	-33.1	602.2	6.3	-33.0

Phase Noise :

