


SURFACE MOUNT MODEL VOLTAGE CONTROLLED OSCILLATOR


Frequency 173-248MHz

VT248A



FEATURES

- ▶ Miniature Size
- ▶ Surface Mount Package
- ▶ Low Phase Noise Performance
- ▶ Electrically Shielded
- ▶ Highly Linear Tuning

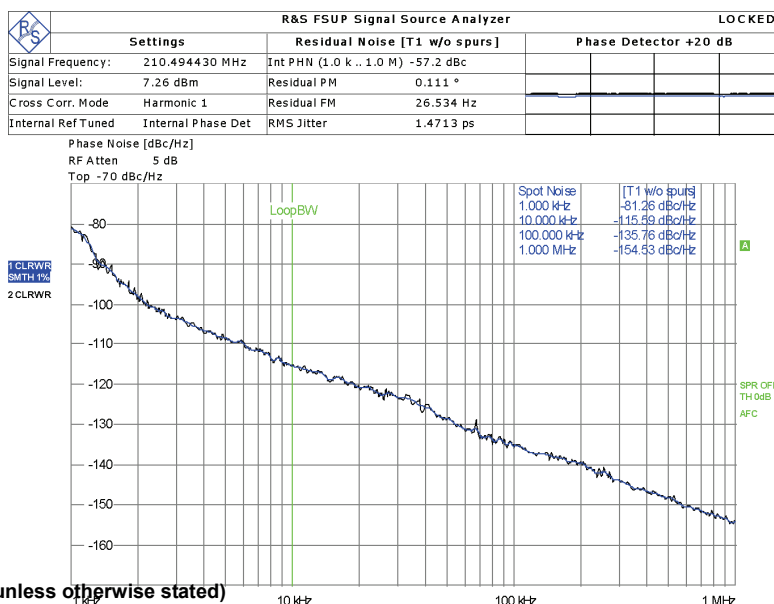


Electrical Specifications, $T_A = +25^\circ\text{C}$, $V_{CC} = +5.0\text{V}$ (unless otherwise stated)

Parameter	Test Conditions	Min	Typ	Max	Units
Frequency Rangs		173		248	MHz
Tuning Voltage (V)		0.5		4.8	V
RF Output Power	173-248MHz	6.0		10.0	dBm
Supply Voltage (Vcc)		4.75		5.25	V
Supply Current (Icc)			17	20	mA
Phase Noise :					
	@10kHz Offset:		-115	-112	dBc/Hz
	@100kHz Offset:		-135	-132	dBc/Hz
Average Tuning Sensitivity	173-248MHz		21.4		MHz/V
Harmonic Outputs			-15		dBc
OperatingTemperature Range		-55		+85	°C
Tune Input Capacitance			330		PF
Output Impedance -			50		Ω
Package Type	SK605(12.7X12.7X4.3mm)				

Comments

X Indicates parameter to be tested 100% in production

BS	R&S FSUP Signal Source Analyzer				
	Settings		Results		
	Supply	Voltage	Frequency		Level
	V min	4.75 V	207.381	MHz	6.63 dBm
	V current	4.92 V	207.336	MHz	6.92 dBm
	V max	5.25 V	207.201	MHz	7.62 dBm

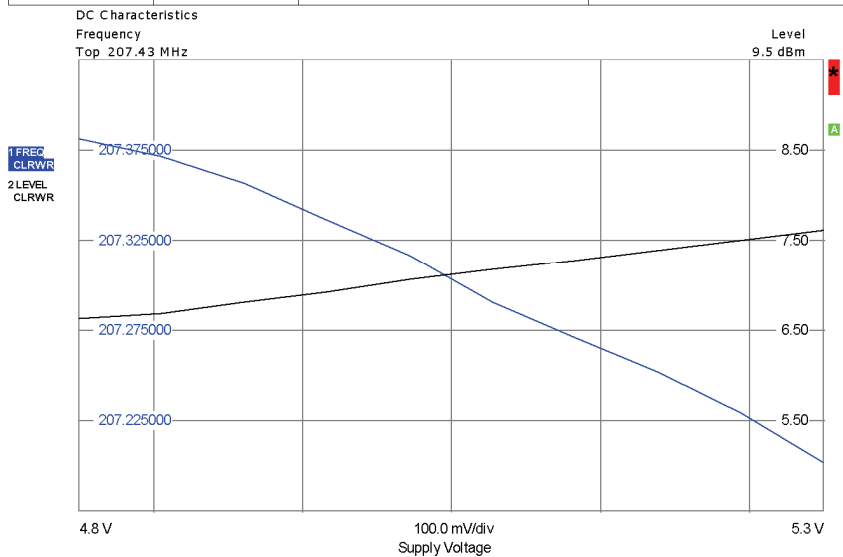

Measurement Aborted

Date: 20.MAY.2009 05:25:04

V TUNE	TUNING SENS. (MHz/V)	FREQUENCY(MHz)			POWER OUTPUT(dBm)			HARMONIC(dBc)		
		-55℃	+25℃	+85℃	-55℃	+25℃	+85℃	-55℃	+25℃	+85℃
0.5	22.4	168.3	164.3	163.1	6.4	6.4	6.3	-16.3	-16.8	-17.5
1.0	20.9	179.3	175.0	174.0	6.9	6.8	6.7	-17.3	-16.7	-17.1
1.5	20.5	189.7	185.5	184.0	7.1	7.2	7.2	-17.4	-17.9	-18.8
2.0	20.0	200.3	196.0	194.3	6.5	6.9	7.0	-16.9	-16.9	-17.1
2.5	20.6	210.8	206.1	204.2	6.5	6.7	6.6	-17.3	-18.2	-18.3
3.0	20.8	221.7	216.6	214.5	6.9	6.9	6.8	-18.1	-18.6	-18.6
3.5	22.3	232.3	227.6	225.3	7.0	7.2	7.2	-18.0	-18.7	-18.6
4.0	21.6	244.0	239.3	236.5	6.5	6.8	7.0	-19.4	-20.2	-20.4
4.5	22.1	254.9	249.9	247.6	6.8	6.8	6.8	-21.4	-21.9	-21.9
4.8	23.2	261.8	256.9	254.1	7.0	7.0	6.9	-23.3	-23.8	-23.7


REVISIONS

NOTE, UNLESS OTHERWISE SPECIFIED:

1. THE METAL CASE IS GROUND
2. ALL HALF VIA CONTACTS ARE PLATED THRU FROM THE PAD ON THE TOP SIDE TO THE PAD ON THE BOTTOM SIDE OF THE BOARD.
3. HATCHED AREAS GROUND AND ARE COVERED WITH LPI SOLDER MASK OVER BARE COPPER. ALL CONTACT AREAS ARE PLATED. SIGNAL VIAS MAY BE LOCATED WITHIN GROUND PLANE.
4. SUBSTRATE MATERIAL: FR-4
5. XXXX REPRESENTS THE MODEL NUMBER.
6. YYWW IS THE DATA CODE.

PIN OUT FOR PLL	
PIN	APPLICATION
2	VT
10	RF OUT
14	VCC

ALL OTHER PINS ARE GROUND

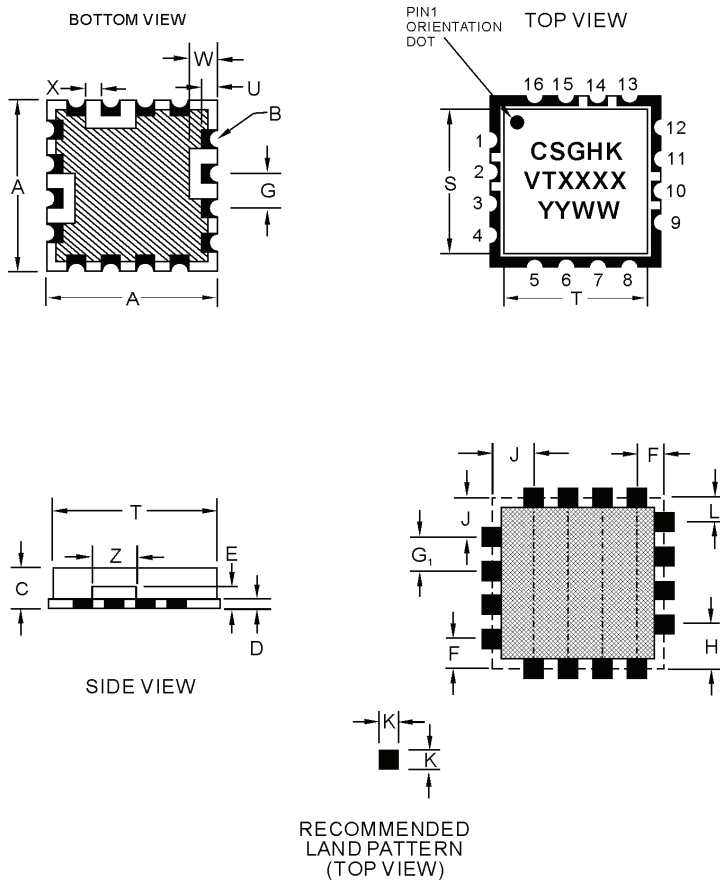

SYMBOL	DIMENSION	
	MILLIMETERS	INCHES
A	12.7±0.25	0.50±0.010
B	R=0.50	R=0.019
C	4.3	0.169
D	0.99MAX	0.039MAX
E	1.75MAX	0.069MAX
F	2.16	0.085
G	2.54±0.08	0.100±0.003
G ₁	2.54	0.100
H	3.07	0.121
J	2.92	0.115
K	1.52	0.060
L	2.00	0.079
S	11.68	0.460
T	11.81	0.465
U	1.10	0.043
W	1.78	0.188
X	1.02	0.040
Z	3.49	0.137

	APPROVALS	DATA	 SK605 PACKAGE MECHANICAL PCB OUTLINE
DRAWN BY			
CHECKED BY			
PROCESS ENG			
QUALITY			